



ABO valve

ABsOlute flow control

SERIES 900

- // PN 16 / Class 150
- // DN 32 - 1600 (1" ¼ - 64")
- // Industrial applications
- // Water, chemicals, gas
- // Oil & gas, air



INTERFLANGES BUTTERFLY VALVES

WWW.ABOVALVE.COM

GENERAL INFORMATION, MATERIALS

BUTTERFLY VALVES SERIES 900 ARE MANUFACTURED IN DN 32 ÷ DN 1600.

TYPE DESIGNATION:

9 2 4 B

Version of body:
B=wafer, T=lug
Material of disc: - see table
Material of seat: - see table
Series 900

MAX. WORKING PRESSURE	
DN 32 ÷ 300	DN 350 ÷ 1600
16 bar	10 bar*

*16 bar upon request

Note: When temperature of medium increases over + 120 °C, the max allowed pressure falls from 16 bar to 14,4 bar and from 10 bar to 9 bar.

GENERAL APPLICATIONS:

Butterfly valves series 900 are suited for many applications where tight shut-off is required, such as:

- Industrial Processing
- Dry Bulk Conveying
- Paper Mills
- HVAC (Heating, Ventilating & Air Conditioning)
- Water and Wastewater
- Light Slurry Handling
- Food and Beverage

INSTALLATION BETWEEN FLANGES (DN 32-600)

Vers.		32/40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
B	PN 6											•	•	•	•	•
	PN10											•	•	•	•	•
	PN16											•	•	•	•	•
	Class 150											•	•	•	•	•
T	PN 6	•	•	•	•	•	•	•	•	•	•	•	•	-	-	-
	PN10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	PN16	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Class 150	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

*For JIS 5K/10K, please consult with manufacturer.

standard

• upon request


OPERATING TORQUES UPON WORKING PRESSURE (NM)*

DN	32/40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PMA 6 bar	6	8	15	20	38	55	70	100	150	235	480	750	1180	1380	2050
PMA 10 bar	8	10	17	25	46	70	80	125	220	290	530	1200	1550	2050	2700
PMA 16 bar	10	12	20	30	55	85	100	150	290	380	580	1650	2100	2700	3750


The above mentioned torques are valid for valves with EPDM seat only, and under the condition that the working medium is liquid. While actuating the valve, the above mentioned figures should be multiplied by a coefficient of 1,2. Using a NBR seat, it is necessary to apply a coefficient of 1,8 for dimensions up to DN 300 and a coefficient of 1,32 for dimensions DN 350 and above. In case the medium is gaseous, or if it contains abrasive particles, it is necessary to apply a secondary coefficient of 1,35. If the working conditions are specific, it is recommended to discuss the selection of the actuator with the manufacturer.

DEMOUNTABLE VERSION DN 32 ÷ DN 1600


Marking: 900B - wafer type / 900T - lug type



Seat is anchored in body




Movement of disc ensured by four-squared endstem



Pivot fixed by pin allows demounting

MATERIALS

While selecting the material of disc and seat for concrete working conditions, it is recommended to consult it with the manufacturer. Execution in other material types can be provided upon request.

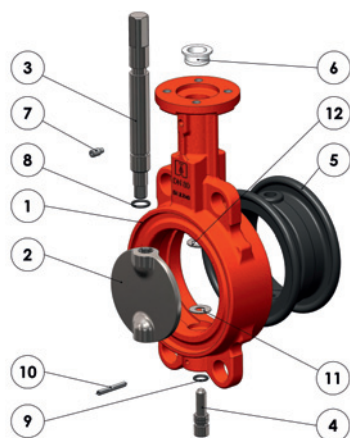

POS.	MATERIAL SPECIFICATION	
1	Body	Ductile iron GGG40 epoxy coated or carbon steel or stainless steel
2	Disc	See table
3	Stem	Stainless steel 1.4021
4	Pivot	Stainless steel 1.4021
5	Seat	See table
6	Bushing	Brass or Delrin
7	Lock washer	Zinc coated steel or stainless steel
8	Stem O-ring	NBR
9	Pivot O-ring	NBR
10	Pin	Zinc coated steel or stainless steel
11	Pivot washer	Stainless steel
12	Stem washer	Stainless steel

MATERIALS OF SEAT AND DISC


SEAT	1	NBR - 10°C + 80°C
	2	EPDM - 25°C + 125°C
	3	Carboxylic NBR - 15°C + 60°C
	4	VITON (FPM) - 25°C + 150°C
	5	Silicone Steam - 25°C + 140°C
	6	Silicone(UMQ) - 25°C + 150°C
	7	NBR BT - 25°C + 70°C
	8	HYPALON® (CSM) - 15°C + 120°C
DISC	0	Brass
	1	Aluminium bronze
	2	Stainless steel 1.4308 (CF8)
	3	Ductile iron GGG40
	4	Stainless steel 1.4408* (CF8M)
	5	HASTELLOY
	6	URANUS B6
	7	Titanium

*HALAR coating as option.


Choice of the seat and disc materials for various media will be recommended upon specific enquiry. The above mentioned max. temperatures for each material of seat are accepted only for a specific medium. Please always consult seat material selection with the manufacturer.

DIMENSIONS DN 32-600 (1"¼ - 24")

Lug type T



Wafer type B

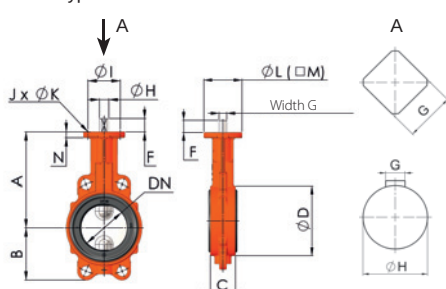


DN		mm	32	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	
		inch	1¼	1½	2"	2½	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	
Version	B	A	136	136	146	153,5	163	172,5	192,5	205	234	270	310	325	365	375	485	565	
	T													350	375	400	485	565	
Valve dimensions		B	54	54	64	72	89	100	118	128	166	202	237	271	314	330	375	460	
		C	33	33	43	46	46	52	56	56	60	68	78	78	102	114	127	154	
		D	78	78	96	113	128	150	184	212	268	320	378	432	483	521	590	695	
		E	110	110	116	131	173	208	235	258	325 ¹	395	464	505	587	633	704	828	
Endshaft dimensions		F	25	25	25	25	25	25	25	25	29	29	36	36	49	80	80		
		G	14							17			22	22	27	27	10	12	14
		H	-	-	-	-	-	-	-	-	-	-	-	-	-	Ø38	Ø42	Ø50	
ISO TOP Flange		I	50							70			102	102	125	140	140	140	165
		J	4																
		K	7							9			10,5	10,5	14	18	18	18	23
Flange dimensions		L	-	-	70							-	-	-	-	175	175	210	
		M	70	70	-	-	-	-	75	75	75	105	105	132	140	-	-	-	
		N	8	8	8	8	8	8	9,5	9,5	14	17	17	17	21	22	27	27	
Weight		Type B	2,1	2,1	3,2	3,8	4,2	5	7,9	9,2	13,5	22,3	33	39	69	83	107	145	
		Type T	2,2	2,2	4,1	4,9	5,6	6,8	9,1	11,2	15,5	28,7	40,3	67	104	136	180	260	
ISO Flange			F05 / F07							F07			F10		F12	F14		F16	

Dimensions mentioned in mm, weight in kg.

¹ For PN 10 308 mm


MANUAL ACTUATION: HANDLEVER

DN 32 - 200



For the valves DN32/40 the flange conforms to F05 and also F07, for the valves DN50-100 the standard flange is F05, flange F07 can be provided upon request.

DN 250 - 300





Type L (only up to 6 bar)

DN	32 - 100	125	150 - 200	250	300
A	240	290	362	450	750
B	75	80	90	135	135
Weight	1,24	1,26	1,4	2,2	3,1

Dimensions mentioned in mm, weight in kg.

MANUAL GEARBOX WITH HANDWHEEL

DN 32 ÷ 600

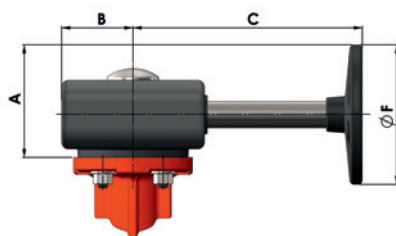

DN	32 - 150	200	250-300	350	400	450	500	600
A	89	89/127**	155	213	263	275	275	350
B	51	51	66	83	83	99	99	126
C	152	152/159**	254	302	334	279	279	366
D	44	44	59	70	70	86	86	114
E	101	101/138,5**	177	242	292	314	314	423
F	125	125/200*	250	350	450	450	450	600
Weight	1,6	1,6	3,7	6,6	6,6	14,5	14,5	27,2
Wheel	SR5	SR5/SR8*	SR10	R14	R18	R18	R18	R24

Dimensions mentioned in mm, weight in kg.

*Optional

**Acc. to handwheel choice

Handlever and gearbox can be supplemented with contacts for signalisation of endpositions.

Other possibilities of actuation:

- Electric actuator 24V, 230V, 380V
- Pneumatic actuator (single/double acting)

Standard coating is orange epoxy painting RAL 2002 - 80 µm. According to customer's request, it is possible to modify the appearance of the colour of butterfly valves ABO.

DIMENSIONS DN 700 - 1600 (28" - 64")




DN	mm	700	800	900	1000	1200	1400	1600
	inch	28	32	36	40	48	56	64
Verion - Double flanged	A	629	666	720	800	940	1000	1150
Valve dimensions	B	522	596	656	720	864	925	1045
	C	165	190	203	216	254	279	318
	D	840	950	1050	1160	1380	1590	1820
	E	95	95	130	130	150	200	300
End Shaft Dimensions	F	16	16	20	22	28	32	36
	G	55	55	75	85	105	120	140
	H	63	63	84	95	117	134	156
	M	254	254	254	254	298	356	356
ISO Top flange Dimensions	I	8	8	8	8	8	8	8
	J	18	18	18	18	22	32	32
	K	300	300	300	300	350	415	415
	L	F25	F25	F25	F25	F30	F40	F40
Top flange Weight		350	580	700	850	1080	1922	2350

Operating torques for DN 700-1600

DN (mm)	Torque (Nm)
700	3500
800	4500
900	6000
1000	8950
1200	12600
1400	18500
1600	24400

The above mentioned torques are valid for valves with EPDM seat, water at +20°C, working pressure 10 bar.

Dimensions mentioned in mm, weight in kg.
Face to face acc. to DIN 3202 K1, ISO 5155, API 609, ISO 5752-20.

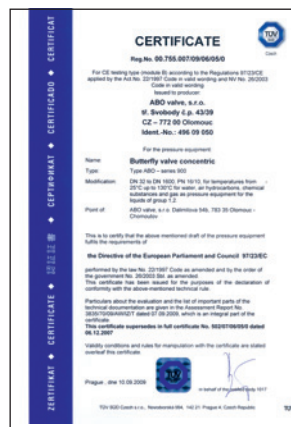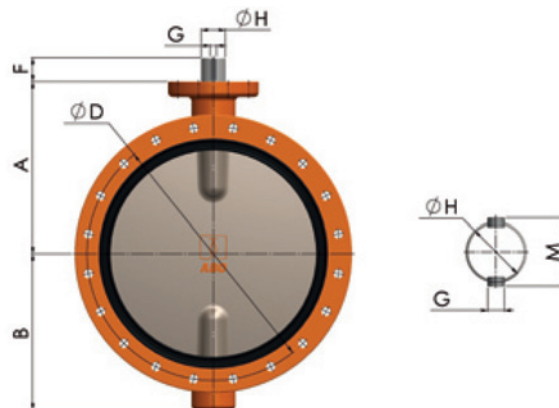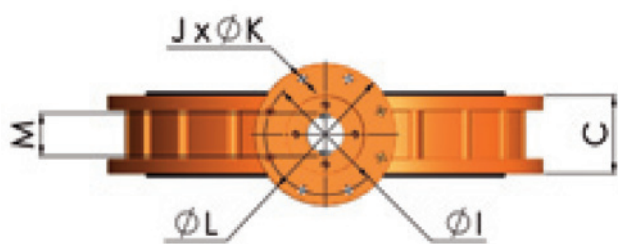

EUROPEAN UNION
EUROPEAN REGIONAL DEVELOPMENT FUND
INVESTMENT IN YOUR FUTURE

The information in this brochure is indicative only. Binding specification will be provided in the offer. ABO valve accepts no liability for damages caused by bad interpretation or use of the information included in this brochure.

5. 6. 2012

Data subject to change.

Company HQ – Czech Republic:
ABO valve, s.r.o.
Dalimilova 285/54, 783 35 Olomouc
Tel: +420 585 202 226, +420 585 224 077
Email: export@abovalve.com
www.abovalve.com

Slovakia:
ABO Slovakia, s.r.o.
Banská Bystrica
Tel: +421 484 145 633
Email: aboslovakia@aboslovakia.sk
www.aboslovakia.sk

Russia:
ABO ARMATURA Ltd.
Smolensk
Tel: +7 4812 31 28 27
Email: aboarmatura@yandex.ru
www.aboarmatura.ru

Singapore:
ABO Asia & Pacific Pte. Ltd.
Singapore
Tel: +65 9728 2441
Email: sales@abovalve.com.sg
www.abovalve.com.sg

Brazil:
ABO Brasil
Simões Filho - Salvador
Tel: +55-71-8787-4599
Email: bernardo@abovalve.com
www.abovalve.com